



GMK67 Aluminum Alloy Kit

Tri-mode wireless gasket gaming keyboard
hot swappable, function knob

Quick Start Guide

Keyboard Features:

Keys: 67 keys

Battery: 1000mAh

Current: 160mA

Voltage: DC 5V

Keyboard size: 325*114*31mm ±2mm

GMK67 Aluminum Alloy CNC Kit Driver download website :
<https://www.boyikeyboard.com/Download.htm>

BOYI Customer Service E-mail address:
boyiservice2020@163.com

BOYI Official Website:
www.boyikeyboard.com

Keyboard Layout:



Product parameter

Kit size (without key caps)	325.6*114*31 ±2mm
Number of keys	66 keys+knob
Connect Mode	BT/2.4G wireless/TYPER-C wired
Backlight color	RGB light
Shaft body	Mechanical shaft body
Featured features	Full key hot swappable, support three pin/five pin shaft body
WARRANTY	Warranty for 12 months (except for man-made damage)



Packing list Keyboard *1, USB-TYPE-C data cable *1, dual spindle/key cap tool *1, user manual *1, 2.4G receiver *1


System requirements

Bluetooth mode: Computers, phones, tablets, and other devices with Bluetooth 4.0, Bluetooth 5.0, or higher Bluetooth functionality.

Wired/2.4G mode: Desktop computers, laptops, and other devices with available USB interfaces.

Tutorial for using(Bluetooth5.0/2.4G/Type-C Tri-Mode)

Wired mode:





When using wired mode, push the switch to the right, FN+TAB key to switch to wired mode, data Connect the keyboard and computer with a cable to use.
Wired connection will charge the the third mock examination keyboard battery at the same time

When the battery is low, the battery indicator lights red and flashes a prompt


Charging voltage/current: DC5V ±1A (MAX).

It is recommended to connect the computer USB port for charging. Using high-power fast charging can easily damage the keyboard

This keyboard does not have waterproof function and may cause keyboard malfunction after liquid injection



2.4G wireless mode:




When using 2.4G wireless, push the switch to the right, use the FN+R key to switch to the 2.4G channel, use the R key to flash, and insert the receiver into the computer USB port, R key light stops flashing, you can use the keyboard wirelessly.

(Press and hold FN+R for about 3 seconds. After the R key flashes quickly, plug the receiver into the computer's USB port to re pair.)

Bluetooth mode:



When using Bluetooth, push the switch to the right and short press FN+Q to switch Bluetooth channel, Bluetooth pairing: Long press FN+Q, wait for the Q key to indicate After the light flashes quickly, search for pairing with Bluetooth successfully Use. (W/E key operation as above)

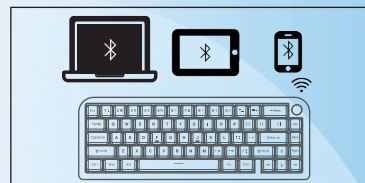

FN composite key

Note: The WIN key always lights up white; Caps key always illuminates white when capitalized

FN+Left CTRL Switch Number Key Default Function

When synchronizing backlight with the left CTRL key, the number keys default to 1~4-functions

When the left CTRL key lights up with white light, the number keys default to F1~F12 functions, and the FN combination

Fn+	F1	F2	F3	F4	F5	F6	F7	F8	F9	F10	F11	F12
WIN	My Computer	Home page	Mail	Calculator	Player	Stop	Previous song	Play / Pause	Next song	Mute	Volume-	Volume+
MAC	Brightness-	Brightness+					Previous song	Play / Pause	Next song	Mute	Volume-	Volume+
Fn+	ESC	WIN	A	S	\]]	↑	↓	←	→	spacebar	
FC	Factory reset	Lock WIN keys	WIN	MAC	Light effect switching	Color switching	Backlight brightness+	Backlight brightness-	Backlight Speed +	Backlight Speed -	Backlight On/Off	

Knob operation: Press and hold for about 5 seconds to switch between volume control/light effect control functions

Volume mode: Short press the knob to turn mute on/off, rotate clockwise to increase volume, and counterclockwise to decrease volume

Light effect mode: Short press to switch backlight light effect, rotate clockwise to increase backlight brightness, and counterclockwise to decrease backlight brightness